



1. APPLICATIONS

- Smart control product range, intelligent code, safe, reliable and cannot be copied.
- Insertable card for control panels in order to facilitate remote control access.
- Activation by the memorised function.



2. BRIDGE SELECTOR

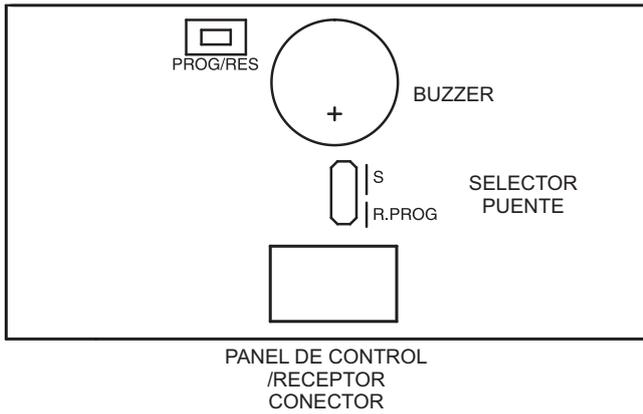



RADIO PROGRAMMING MODE:




3. TRANSMITTER MANUAL PROGRAMMATION

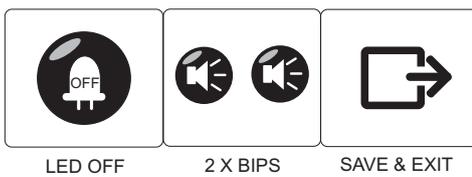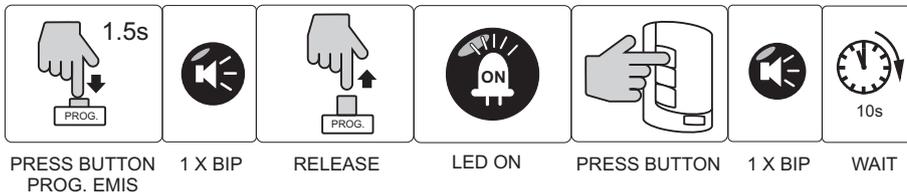

3.1 TRANSMITTER RADIO PROGRAMMING

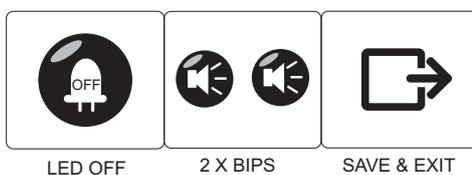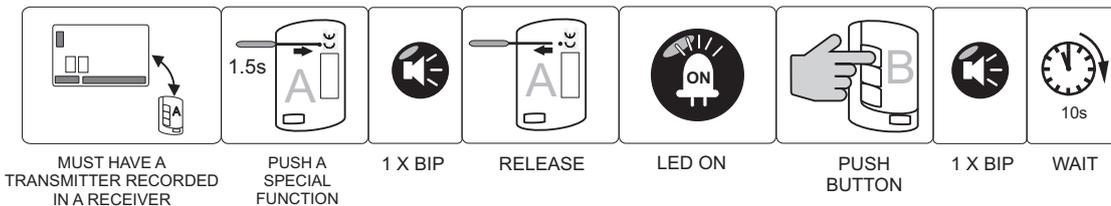

3.2 MEMORY RESET

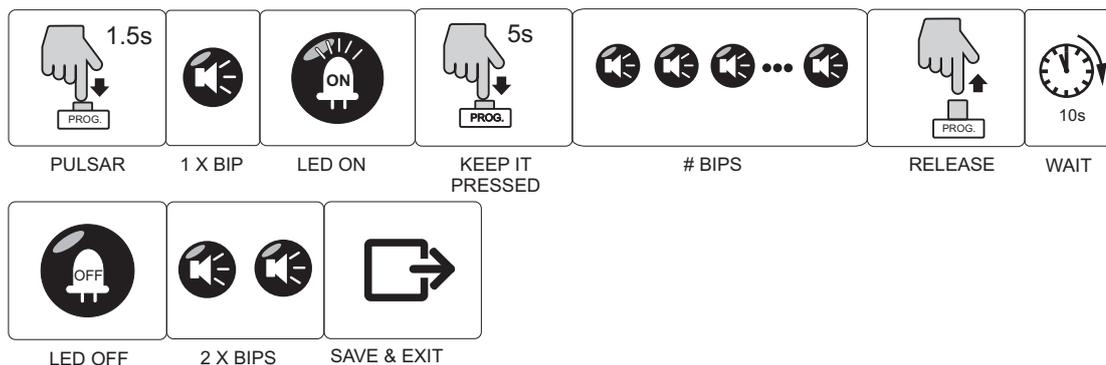

TECHNICAL SPECIFICATIONS

Power	Control Pannel 12V
Power consumption	16mA
Output type	Open collector 100mA
Available codes	2.097.152.281 Millions
Encryption technology	Hopping code
Key Encryption	64 bits
Detection of errors during transmission	2 CRC bits
Number of codes	255 / 1000 different codes
Frecuency	433.92 or 868.35MHz
Certificates	ETS300-220/ETS300-683
Spurious emissions	< -57dBm
Sensitivity	< -104dBm
Range	60m
Temperature	0 to 70°
Antenna	17cm / 8,5cm

WARNING!!

- Equipment installation and start-up, can only be executed by qualified personal.

CE DECLARATION OF CONFORMITY
For more information visit the website www.aerf.eu

